

Today, the changing market landscape demands open solutions. That is why you need a safe metering investment for the future. The E650 meter family offers you maximum flexibility through unique communication modularity, high interoperability and a comprehensive functionality set, which includes:

- maintenance-free and robust long-life design in electronics and mechanics
- lowest failure rate in the market
- more than 30 different communication options
- extensive functionality covering a broad range of applications
- installation support and anti-tampering features
- built-in smart grid functionality

Manage energy better

Landis+Gyr is the leading global provider of integrated energy management solutions for the utility sector. Offering one of the broadest portfolios, we deliver innovative and flexible solutions to help utilities solve their complex challenges in smart metering, grid edge intelligence and smart infrastructure. With sales of USD 1.8 billion, Landis+Gyr employs approximately 5,600 people in over 30 countries across five continents, with the sole mission of helping the world manage energy better.

More information is available at www.landisgyr.eu.

Landis+Gyr in short

- Swiss HQ with 5'600 employees in 30+ countries worldwide
- Serving 3'500+ utilities worldwide
- Over USD 1b of self-funded R&D investment since 2011
- Over 90 million connected intelligent devices deployed
- More than 14 million meter points under managed services
- World's largest smart grid IoT project with 300+ million devices globally
- Frost & Sullivan Global AMI Company of the Year 2017 - the 4th consecutive year

Landis+Gyr AG
Theilerstrasse 1
6301 Zug
Switzerland

Tel. +41 41 935 6000
Fax +41 41 935 6601
info@landisgyr.com
www.landisgyr.eu



Electricity Meter
Landis+Gyr E650
ZMD300/400
ZFD400

The ultimate building block for your
industrial and commercial metering
infrastructure

Leading and most proven industrial & commercial meter

Over 2 million metering devices installed in 80 countries around the world

E650 is the most proven meter, which achieves maximum performance in all industrial and commercial application areas thanks to its unique modular architecture, exceptional feature set and high interoperability.



Basic Functionality

Quality and Safety: The extensive basic functionality already meets all major IEC standards applicable to the respective requirements.

Electronics	Wide-voltage power supply
	Large LCD display
	Up and down buttons for display
	Optical button for the display
	Utility sealed reset button
	Optical interface (IEC 62056)
	Optical test output
	Three control inputs
	Two output contacts
	8 measurement channels with total register
Recording	24 energy registers
	Stored values register
	9 operating time registers
	Event log
Functions	Installation support on display
	Set mode via buttons
	Real-time clock with power reserve
	Instantaneous voltage values
	Voltage monitoring
	Gregorian and Persian calendar
Housing	Remote control of output contacts
	Glass fiber reinforced, antistatic
	Crystal clear, unbreakable windows
	Wiring diagram on faceplate
	Utility sealed battery box

Basic Configuration

Landis+Gyr E650 (ZMD300/400 and ZFD400) is the answer to your specific needs: from the reliable commercial meter to the complex measuring device with comprehensive additional functionality for advanced data acquisition and flexible tariff control of large industrial customers..

Modular communication units provide the right choice for the best data channel at all times. «Plug and Play» modules also offer you full freedom of choice for deployment of new communication technologies.

Application	High voltage	E650 (ZFD402C)	E650 (ZFD408C)	E650 (ZFD410C)	E650 (ZMD402C)	E650 (ZMD405C)	E650 (ZMD410C)	E650 (ZMD310C)	E650 (ZFD410A)	E650 (ZMD310A)
		■	■	■	■	■	■	■	■	■
	Medium voltage	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■
Connection Type	Transformer conn.	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■
	Direct connection	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■
Metering accuracy (active/reactive energy)	Class 0.2/0.5	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■
	Class 0.5/1.0 MID C	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■
	Class 1.0/1.0 MID B	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■
		Combi				Active				
		■	■	■	■	■	■	■	■	■
Energy Type	Active energy	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■
	Reactive energy	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■
	Apparent energy	■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■	■	■



Additional Functionality

Tariff functions	Average demand Time-of-use (TOU) tables Programmable matrix-based mixes control
Measured Values	Power factor Instantaneous values for current, phase angle, frequency, power factor
Recording	24 demand registers 2 power factor register 2 independent load profiles (billing and power quality monitoring) with integration period from 1' up to 60' minutes 26-channel profile memory
Special functions	Monitoring for power, current, power factor Backlit and LED Alert programmable display CT/VT error correction THD measurements and calculation of losses (Transformer and Line) Detection of strong magnetic fields Opening detection of terminal cover
Extension boards (only one possible)	6 outputs 2 control inputs, 4 outputs 4 control inputs, 2 outputs 4 active inputs, 2 relay outputs 8A 3 control inputs, 2 relay outputs, auxiliary power supply 4 outputs, various auxiliary power supply

Software Tools

MAP 120	Parameterisation
.MAP 110	Installation support Meter data readout Load profile analysis Security system visualisation Communications settings

Enhanced communication capability through combined IEC 1107 and DLMS™ protocols

Only complete availability of reliable metering data guarantees an efficient billing process. The range of Landis+Gyr E650 (ZMD300/400 and ZFD400) meters is «bilingual»: handling the legacy IEC1107 protocol and the well established DLMS™ both of which comply with the IEC62056 standard.

An optimal data flow is archived through the built-in communication interface or by readily interchangeable communication units.

Exceptional functionality for demanding I&C metering

Billing Data management:

- Large variety of registers to track and record the measured quantities you require
- High flexibility to link register values

Network monitoring:

- Monitor instantaneous values against threshold and record deviations in a snapshot event log
- Monitor and record disturbances for analysis and preventive network maintenance
- Protect your assets, e.g. transformers, against overload with real-time alarm information through SMS
- Detect tampering attempts and trigger real-time alarms (SMS)

Adaptation and Installation support:

- Smart installation support tools to avoid errors, simplify installation and service processes
- A set of powerful software tools (MAP Suite) to customise meter to your application needs, e.g. time-of-use tables, billing lists, profile memory, remote parameter modification, etc.

Smart Grid applications:

- Additional auxiliary power supply to assure data reading during power down phases
- Power quality monitoring functions with alarm and log features
- Real-time alarm system (SMS)
- Boolean I/O control functions to link and combine measured quantities

ZMD310AT/CT

E650 Series 4

Technical Data



Building on its tradition of industrial meters, Landis+Gyr has developed the E650 Series 4, the latest generation of ZMD300 meters. These meters feature a new hardware platform, combining modern technology with proven functions.

Date: 11.09.2017

File name: D000062000 E650 ZMD300xT Series 4 Technical Data en a.docx

Revision history

Version	Date	Comments
a	11.09.2017	Updated to Series 4 based on Series 3 document D000030104: Added maximum current data. Updated measurement accuracy. Added power consumption data. Added product safety information. Added extension board 421x. Deleted extension board 046x. Added input, output, extension board and additional power supply information.

Although the information contained within this document are presented in good faith and believed to be correct, Landis+Gyr (including its affiliates, agents and employees) disclaim any and all liability for any errors, inaccuracies or incompleteness relating to the product. Landis+Gyr makes no warranty, representation or guarantee regarding the performance, quality, durability or suitability of the products for any particular purpose. To the fullest extent permitted by law Landis+Gyr disclaims (1) any and all liability arising out of the use of the product, (2) any and all liability, including, but without limitation to, special, consequential and indirect damages and losses, and (3) any and all implied warranties, including, but without limitation to, fitness for purpose and merchantability.

The information contained in this document is strictly confidential and is intended for the addressee only. The unauthorised use, disclosure, copying, alteration or distribution of this document or the contents thereof is strictly prohibited and may be unlawful.

All product information are subject to change without notice.

Design

E650 is the most proven platform for industrial and commercial meters with more than 2 million meters installed in over 80 countries.

E650 is the result of a century Landis+Gyr experience in metering field combined with high quality requirements.

Range

E650 meters are the answer to a wide range of specific needs: from the reliable commercial meter to the complex measuring device with comprehensive additional functionality for sophisticated data acquisition and flexible tariff control at large industrial customers.

Application

E650 direct connected meter offer the extensive voltage and current settings to connect to low voltage power distribution systems.

Covering most of the energy measurement and calculation use cases, E650 meters record active and reactive energy consumption in all three-phase four-wire and three-phase three-wire networks with powerful recording capabilities.

For instance, 32 energy rate registers can be combined in many different ways through 17 measured quantities, per quadrants or per phases. Those registers can be controlled by various sources (Control inputs, time switch or communication signals). 24 maximum demand rate registers and 2 lowest power factor registers with time stamp are available as well.

8 operating time registers settable with various control signals could be used in various situations from fraud tentatives up to operation follow up.

All registers can be stored in stored value profiles that allows the storage of 84 values for one year with a weekly reset.

One out of 2 load profiles available can be used to record energy registers, last average demand, average power factor for billing purposes in the case of dynamic tariffs, for instance, with an integration period programmable according to real needs.

E650 has various options to detect fraud attempts from energy calculation modes up to hardware options as DC – strong field detection or integrated terminal cover detection switch with time stamped records in the event logbook and optional local signalisation over a special LED or arrows on the LCD display.

In the Time of Use part the utility can define up to 12 different week/season tables, 100 special days and 12 day tables that are controlled by 16 time switch control signals. Programmable passive tables and emergency settings allow to manage unexpected or future situations without any additional workload.

A comprehensive logbook offers the possibility to record more than 70 different events with time stamp in a circular table of 500 events.

E650 can be used for network monitoring with key average measurement RMS recordings (U, I, P, Q, PF, THD).

Up to 26 channels can be recorded in a second load profile with a different integration period programmable from 1 minute up to 60 minutes which allows an excellent network monitoring.

Most power quality events (over-/undervoltages, power failures) are logged in the event logs with number of event, timestamp and phase allowing an easy calculation of SAIDI (System Average Interruption Duration Index) parameters. Up to 30 events for power failures can be recorded in a dedicated event log.

All information (stored data profile, load profiles, logbook, dedicated event log) are stored in non-volatile memory, which prevents any losses of critical data information.

Through a control table, it is possible to combine various signal sources to control signals with Boolean operators.

E650 is able to achieve simple automatism without any additional components.

Such control capabilities could be used not only to control registers but outputs locally or remotely as well.

E650 have extended digitals input and outputs (static and relays) from 3 inputs/2 outputs as basis combined with a variety of option boards offering different capabilities.

Modular communication

Type AT/CT meters are equipped with modular communication units, which provide the right choice for the best data channel at all times. Plug & Play modules also offer you full freedom of choice for deployment of new communication technologies.

Installation support

An indication of phase voltages, phase angles, rotating field and energy direction supports the installation.

Summary of the main features

ZMD300	
Measured quantities	
Energy (quadrants, phases, direction, reverse stop)	17 ¹⁾
Summation channels (virtual or digital input)	2 ¹⁾
Losses (OLA, NLA)	2 ¹⁾
Losses (I^2 , U^2)	2 ¹⁾
Active energy harmonic distortion	2 ¹⁾
Rotating field direction	•
Energy and demand registers	
Energy rates	32
Total energy	27
Demand rates	24
Power factor (combimeters only)	2
Last average and current demand	2x10
Memory depth per value (84 values selectable)	53
Other registers	
Operating time	8
Diagnostic registers	41
Tariff module	
Season tables	12
Week tables	12
Day tables	12
Special days (set 26 years ahead)	100
Time of use control signals	16
Emergency settings	•
Active/passive time tables	•
Control table – 7 different control sources combinations to control 16 control signals	
Communication and digital inputs, TOU, voltage, power factor, demand, current monitoring, status, missing voltages	•
Load profiles (integration period from 1 up to 60 minutes)	
Independent load profiles	2 (1 optional)
Maximum number of captured channels	26
Data information storage (stored data profile, 2 load profiles, event log, dedicated event logs)	
Non-volatile memory (Flash memory)	•

¹⁾ Value recordable in dedicated load profile from 1 up to 60 minutes (typical 15 minutes).

ZMD300	
Instantaneous values	
Voltage phase-neutral	● ²⁾
Current	(I1, I2, I3, IN) ²⁾
Frequency	● ²⁾
Phase angles	● ²⁾
Active power (+/-)	(P1, P2, P3, P total) ²⁾
Reactive power (+/-)	(Q1, Q2, Q3, Q total) ²⁾
Power factor	PF1, 2, 3, (PF total) ¹⁾
TTHD of active power	Sum ²⁾
TTHD of phase voltage	(Phase 1, 2, 3) ²⁾
TTHD of phase current	(Phase 1, 2, 3) ²⁾
TTHD of voltage	Sum ²⁾
TTHD of current	Sum ²⁾
Measurements monitoring with thresholds and records in event log	
Over-/undervoltage phase-neutral	●
Overcurrent (phase and neutral)	●
Event logs	
Maximum number of entries time stamped (s)	1000
Dedicated event log with snapshot	
Maximum number of entries time stamped (s)	30
SMS alarm capabilities	
Alarm numbers of digital inputs	1 max.
Alarms on event (SMS)	●

¹⁾ Value recordable in dedicated load profile from 1 up to 60 minutes (typical 15 minutes).

²⁾ Value recordable in another load profile from 1 up to 60 minutes (typical 1 minute).

E650 Series 4 ZMD300AT/CT – Technical Data

General

Voltage

Nominal voltage U_n	3 x 110/190 to 133/230 V 3 x 220/380 to 240/415 V
-----------------------	--

Voltage range	80 to 115%
---------------	------------

Frequency

Nominal frequency f_n	50 or 60 Hz
Tolerance	$\pm 2\%$

IEC-specific data

Current

Base current I_b	selectable: 5, 10, 20 or 40 A
--------------------	-------------------------------

Maximum current I_{max}	
Metrological	selectable: 40, 60, 80, 100 or 120 A
Overload	120 A

Short-circuit current <10ms	5000 A
-----------------------------	--------

Measurement accuracy

ZMD310xT	
Active energy, to IEC 62053-21	class 1
Reactive energy, to IEC 62053-24	class 1

Measurement behaviour

Starting current	
According to IEC	0.4% I_b
Typical	0.3% I_b
The start-up of the meter is controlled by the starting power and not by the starting current.	

Starting power in M-circuit	single-phase
Nominal voltage x starting current	

MID-specific data

Current (for class B)

Minimum current I_{min}	0.25, 0.5, 0.75, 1.0 A
---------------------------	------------------------

Transitional current I_{tr}	0.5, 1.0, 1.5, 2.0 A
-------------------------------	----------------------

Maximum current I_{max}	60, 80, 100, 120 A
---------------------------	--------------------

Measurement accuracy	to EN 50470-3
ZMD310xT	class B

Measurement behaviour

Starting current I_{st}	
Class B: I_{st}	0.02, 0.04, 0.06, 0.08 A

General

Operating behaviour

Voltage failure (power-down)	
Bridging time	0.5 s
Data storage	after another 0.2 s
Switch off	after approx. 2.5 s

Voltage restoration (power-up)

Function standby 3 phases	after 2 s
Function standby 1 phase	after 5 s
Detection of energy direction and phase voltage	after 2 to 3 s

Power consumption

Power consumption per phase in voltage circuit	
Without communication unit, without auxiliary supply	
3 x 110/190 to 133/230 V	0.5 W 1.0 VA
3 x 220/380 to 240/415 V	0.7 W 1.7 VA

Power consumption per phase in voltage circuit	
With communication unit, without auxiliary supply	
3 x 110/190 to 133/230 V	1.8 W 3.5 VA
3 x 220/380 to 240/415 V	1.9 W 4.1 VA

Power consumption per phase in current circuit	
Phase current	10 A
Active power (typical)	0.03 W

Environmental influences

Temperature range	to IEC 62052-11
Metrological	-40 °C to +70 °C
Storage	-40 °C to +85 °C

Temperature coefficient	
Range	-40 °C to +70 °C
Average value (typical)	$\pm 0.012\%$ per K
at $\cos\varphi=1$ (from 0.05 I_b to I_{max})	$\pm 0.02\%$ per K
at $\cos\varphi=0.5$ (from 0.1 I_b to I_{max})	$\pm 0.03\%$ per K

Ingress protection to IEC 60529	IP51
---------------------------------	------

Electromagnetic compatibility

Electrostatic discharges	to IEC 61000-4-2
Air discharge	15 kV
Contact discharge	8 kV

Electromagnetic RF fields	to IEC 61000-4-3
80 MHz to 2 GHz	10 and 30 V/m

Radio interference suppression according to IEC/CISPR 22	class B
--	---------

Fast transient burst test	to IEC 61000-4-4
Current and voltage circuits under load according to IEC 62053-21/23	4 kV
Auxiliary circuits > 40 V	2 kV

Surge test	to IEC 61000-4-5
Current and voltage circuits	4 kV
Auxiliary circuits > 40 V	1 kV

Immunity to conducted disturbances IEC 61000-4-6	
150 kHz to 80 MHz	10 V

Immunity to conducted disturbances according to CENELEC TR 50579	2 to 150 kHz
--	--------------

Insulation strength

Insulation strength	4 kV at 50 Hz during 1 min.
---------------------	-----------------------------

Impulse voltage 1.2/50 μ s	to IEC 62052-11
Current and voltage circuits	8 kV
Auxiliary circuits	6 kV

Protection class II	to IEC 62052-11
---------------------	-----------------

Product safety

Normal environmental conditions	IEC 62052-31
Overvoltage category	III
Pollution degree	2
Max. operating altitude	2000 m
Utilisation category	UC3

Calendar clock

Calendar type	Gregorian or Persian (Jalaali)
---------------	--------------------------------

Accuracy	< 5 ppm
----------	---------

Backup time (power reserve) meter	
With supercapacitor	> 20 days
Charging time for max. backup time	300 h
With battery (optional)	10 years
Battery type	CR-P2
Battery temperature range	-40 °C to +55 °C

Display

Characteristics	
Type	LCD (liquid crystal display)
Digit size in value field	8 mm
Number of digits in value field	up to 8
Digit size in index field	6 mm
Number of digits in index field	up to 8

Inputs (passive)

HLV, reinforced insulation by optocoupler	
Number on base meter	3
Number on extension board 420x	4
Number on extension board 240x	2
Control voltage U_S	100 to 240 V _{AC}
Range	80 to 115 %
Input current	< 0.8 mA at 230 V _{AC}

SELV, reinforced insulation by optocoupler	
Number on extension board 326x	3
Control voltage U_S	12 to 24 V _{DC}
Range	80 to 115 %
Input current	< 1.5 mA at 24 V _{DC}

Inputs (active)

SELV, reinforced insulation by optocoupler	
Active inputs, external closing contact required for activation (no control voltage necessary)	
Number on extension board 421x	4
Open circuit voltage (contact open)	< 5 V
Short-circuit current (contact closed)	< 5 mA
Max. contact resistance	< 500 Ohm

Outputs (solid-state relay)

HLV or SELV, reinforced insulation by solid-state relay	
Voltage	12 to 240 V _{AC/DC}
Max. current for each output	100 mA _{RMS}
Max. switching frequency (pulse length 20 ms)	25 Hz
Contact resistance (typical)	13–18 Ohm

Base meter	
Number	2
Max. current all outputs together	200 mA _{RMS}
Derating above 45 °C ambient	0.8 mA / °C

Extension board 420x	
Number	2
Max. current all outputs together	200 mA _{RMS}
Derating above 45 °C ambient	0.8 mA / °C

Extension board 240x	
Number	4
Max. current all outputs together	200 mA _{RMS}
Derating above 45 °C ambient	0.8 mA / °C

Extension board 060x

Number	6
Max. current all outputs together	200 mA _{RMS}
Derating above 45 °C ambient	0.8 mA / °C

Extension board 045x

Number	4
Max. current all outputs together	200 mA _{RMS}
Derating above 45 °C ambient	0.8 mA / °C

Extension board 047x

Number	4
Max. current all outputs together	200 mA _{RMS}
Derating above 45 °C ambient	0.8 mA / °C

Mechanical relay

HLV, reinforced insulation, intended to control auxiliary devices

Number on extension board 326x	2
Number on extension board 421x	2
Max. voltage	250 V _{AC}
Max. current for each relay	8 A
Max. current all relays together	8 A
Max. operations with $\cos\varphi \sim 1$	100 000
Contact resistance (typical)	10 mOhm
Withstand across open contact	1000 V _{AC}
Withstand between contacts	1500 V _{AC}

Outputs (optical)

Optical test outputs	active and reactive energy
Type	red LED
Number	2
Meter constant	selectable

Communication interface

Optical interface	to IEC 62056-21
Type	serial, asynchronous, half-duplex
Max. transmission rate	9600 bps
Protocols	IEC 62056-21 and DLMS

Communication units

Exchangeable communication units for various applications.

Additional power supply (optional)**On extension board 045x**

HLV, reinforced insulation	
Nominal voltage range	100 to 240 V _{AC/DC}
Tolerance	80 to 115% U _n
Frequency	50 or 60 Hz

VIN = 80 V

Max. power consumption ¹⁾	5.6 W / 8.4 VA
Max. current	105 mA

VIN = 276 V

Max. power consumption ¹⁾	5.6 W / 12.4 VA
Max. current	45 mA

On extension board 047x

SELV, reinforced insulation	
Nominal voltage range	12 to 48 V _{DC}
Tolerance	80 to 115% U _n
Max. power consumption ¹⁾	5.2 W
Max. current (V _{IN} = 9.6 V)	530 mA

On extension board 326x

SELV, reinforced insulation	
Nominal voltage range	12 to 24 V _{DC}
Tolerance	80 to 115% U _n
Max. power consumption ¹⁾	5.2 W
Max. current (V _{IN} = 9.6 V)	530 mA

¹⁾ Power consumption without mains supply. If auxiliary and mains supply are available, the consumption is shared arbitrarily.

Weight and dimensions

Weight	approx. 1.5 kg
--------	----------------

External dimensions

Width	177 mm
Height (with short terminal cover)	244 mm
Height (with standard terminal cover)	281.5 mm
Height (with extended hook)	305.5 mm
Depth	75 mm

Suspension triangle

Height (with extended hook)	230 mm
Height (suspension eyelet open)	206 mm
Height (suspension eyelet covered)	190 mm
Width	150 mm

Terminal cover

Short	no free space
Standard (opaque, transparent)	40 mm free space
Long (opaque, transparent)	60 mm free space
GSM	60 mm free space
ZxB type 80 mm	80 mm free space
ZxB type 110 mm	110 mm free space
ADP2 adapter	

Housing material

Polycarbonate, partly glass-fibre reinforced

Environmental protection

RoHS compliant design

Connections


Phase connections

Type	screw type terminals
Diameter for $I_{\max} \leq 80 \text{ A}$	8.5 mm
Diameter for $I_{\max} > 80 \text{ A}$	9.5 mm
Min. conductor cross-section	10 mm ²
Max. cross-section cable	35 mm ² (up to 120 A)
Max. cross-section strand	25 mm ² (up to 80 A)
Screw head	Pozidrive Combi No. 2
Screw dimensions	M6 x 14
Screw head diameter	$\leq 6.6 \text{ mm}$
Tightening torque (min...max)	3...5 Nm


Other connections

Type	screwless spring-type terminal
Max. current of voltage outputs	1 A


Meter dimensions (standard terminal cover)

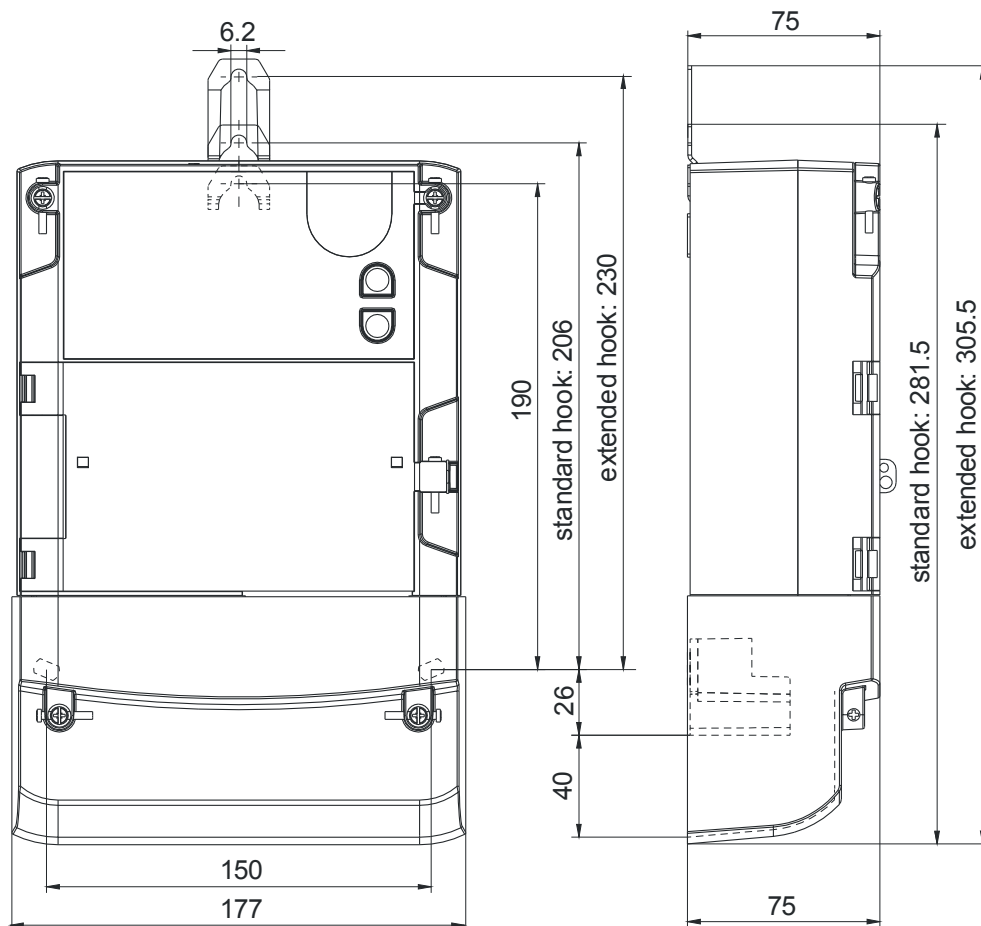

Terminal dimensions

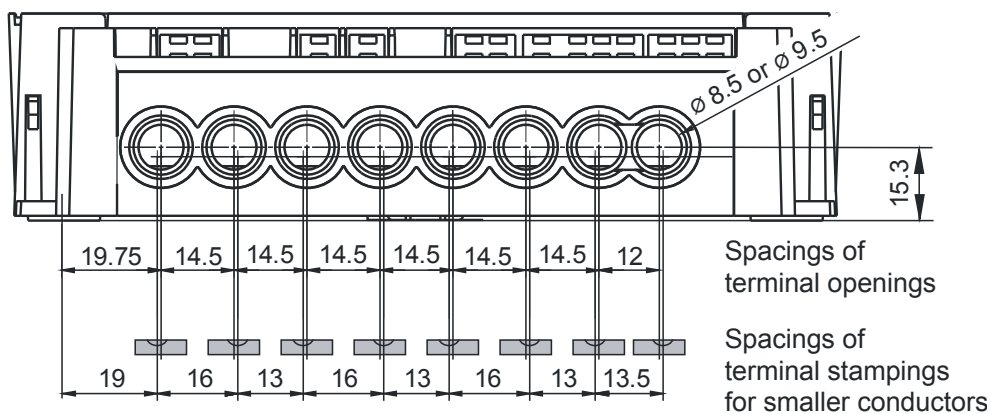

Terminal layout

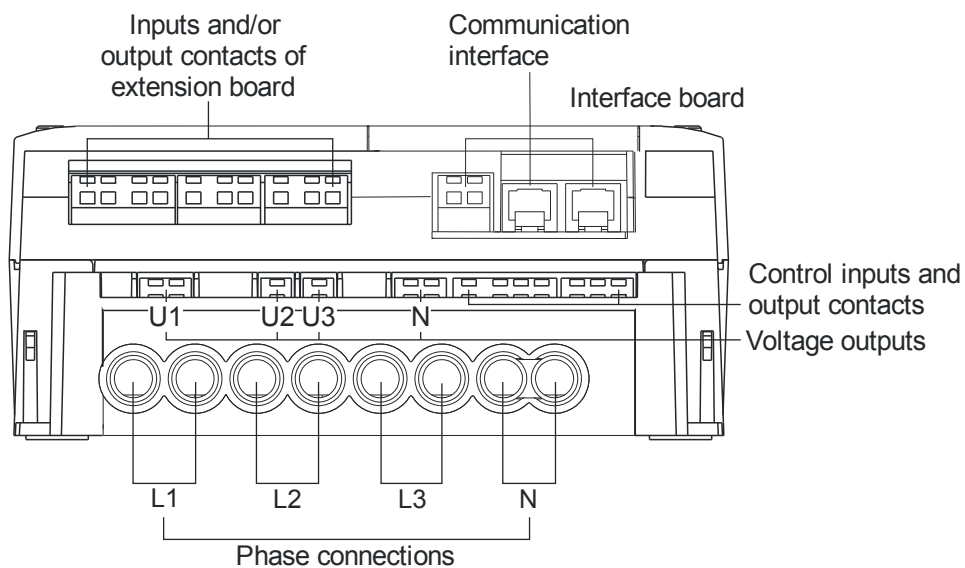

Type designation		ZMD	3	10	C	T	44	4207	S4
Network type									
ZMD	3-phase 4-wire network (M-circuit)								
Connection type									
3	Direct connection								
Accuracy class									
10	Active energy class 1 (IEC), B (MID)								
Measured quantities									
C	Active and reactive energy								
A	Active energy								
Construction									
T	With exchangeable communication units								
Tariffication									
21	Energy rates, external rate control via control inputs								
24	Energy rates, internal rate control via time switch (additionally possible via control inputs)								
41	Energy and demand rates, external rate control via control inputs								
44	Energy and demand rates, internal rate control via time switch (additionally possible via control inputs)								
	All versions with 3 control inputs and 2 output contacts								
Additional functions									
000x	No extension board								
060x	6 outputs								
240x	2 control inputs, 4 outputs								
420x	4 control inputs, 2 outputs								
421x	4 active inputs, 2 relay outputs 8A								
326x	3 control inputs, 2 relay outputs, auxiliary power supply 12 to 24 V _{DC}								
045x	4 outputs, auxiliary power supply 100 to 240 V _{AC} /V _{DC}								
047x	4 outputs, auxiliary power supply 12 to 48 V _{DC}								
xxx0	No additional functions								
xxx2	DC magnet detection								
xxx7	Load profile								
xxx9	DC magnet detection and load profile (integrated terminal cover switch option only available in this configuration)								
Series 4									

Contact:

Landis+Gyr AG
Theilerstrasse 1
CH-6301 Zug
Switzerland
Phone: +41 41 935 6000
www.landisgyr.com



ZMD405AT/CT, ZFD405AT/CT, ZMD410AT/CT, ZFD410AT/CT

E650 Series 4

Technical Data



Building on its tradition of industrial meters, Landis+Gyr has developed the E650 Series 4, the latest generation of ZxD400 meters. These meters feature a new hardware platform, combining modern technology with proven functions.

Date: 25.05.2018

File name: D000062002 E650 ZxD400xT Series 4 Technical Data en b.docx

Revision history

Version	Date	Comments
a	11.09.2017	Updated to Series 4 based on Series 3 document D000030106: Added maximum current data. Updated measurement accuracy. Added power consumption data. Added product safety information. Added extension board 421x. Deleted extension board 046x. Added input, output, extension board and additional power supply information.
b	25.05.2018	Updated maximum current data.

Although the information contained within this document are presented in good faith and believed to be correct, Landis+Gyr (including its affiliates, agents and employees) disclaim any and all liability for any errors, inaccuracies or incompleteness relating to the product. Landis+Gyr makes no warranty, representation or guarantee regarding the performance, quality, durability or suitability of the products for any particular purpose. To the fullest extent permitted by law Landis+Gyr disclaims (1) any and all liability arising out of the use of the product, (2) any and all liability, including, but without limitation to, special, consequential and indirect damages and losses, and (3) any and all implied warranties, including, but without limitation to, fitness for purpose and merchantability.

The information contained in this document is strictly confidential and is intended for the addressee only. The unauthorised use, disclosure, copying, alteration or distribution of this document or the contents thereof is strictly prohibited and may be unlawful.

All product information are subject to change without notice.

Design

E650 is the most proven platform for industrial and commercial meters with more than 2 million meters installed in over 80 countries.

E650 is the result of a century Landis+Gyr experience in metering field combined with high quality requirements.

Range

E650 meters are the answer to a wide range of specific needs: from the reliable commercial meter to the complex measuring device with comprehensive additional functionality for sophisticated data acquisition and flexible tariff control at large industrial customers.

Application

E650 offers high flexibility to connect to different power system distributions from low up to high voltage levels thanks to various voltage and current settings.

Covering most of the energy measurement and calculation use cases, E650 meters record active and reactive energy consumption in all three-phase four-wire and three-phase three-wire networks with powerful recording capabilities.

For instance, 32 energy rate registers can be combined in many different ways through 17 measured quantities, per quadrants or per phases. Those registers can be controlled by various sources (Control inputs, time switch or communication signals). 24 maximum demand rate registers and 2 lowest power factor registers with time stamp are available as well.

8 operating time registers settable with various control signals could be used in various situations from fraud tentatives up to operation follow up.

All registers can be stored in stored value profiles that allows the storage of 84 values for one year with a weekly reset.

One out of 2 load profiles available can be used to record energy registers, last average demand, average power factor for billing purposes in the case of dynamic tariffs, for instance, with an integration period programmable according to real needs.

E650 has various options to detect fraud attempts from energy calculation modes up to hardware options as DC – strong field detection or integrated terminal cover detection switch with time stamped records in the event logbook and optional local signalisation over a special LED or arrows on the LCD display.

In the Time of Use part the utility can define up to 12 different week/season tables, 100 special days and 12 day tables that are controlled by 16 time switch control signals. Programmable passive tables and emergency settings allow to manage unexpected or future situations without any additional workload.

A comprehensive logbook offers the possibility to record more than 70 different events with time stamp in a circular table of 500 events.

E650 can be used for network monitoring with key average measurement RMS recordings (U, I, P, Q, PF, THD).

Up to 26 channels can be recorded in a second load profile with a different integration period programmable from 1 minute up to 60 minutes which allows an excellent network monitoring.

Most power quality events (over-/undervoltages, power failures) are logged in the event logs with number of event, timestamp and phase allowing an easy calculation of SAIDI (System Average Interruption Duration Index) parameters. Up to 30 events for power failures can be recorded in a dedicated event log.

All information (stored data profile, load profiles, logbook, dedicated event log) are stored in non-volatile memory, which prevents any losses of critical data information.

Through a control table, it is possible to combine various signal sources to control signals with Boolean operators.

E650 is able to achieve simple automatism without any additional components.

Such control capabilities could be used not only to control registers but outputs locally or remotely as well.

E650 have extended digitals input and outputs (static and relays) from 3 inputs/2 outputs as basis combined with a variety of option boards offering different capabilities.

Modular communication

Type AT/CT meters are equipped with modular communication units, which provide the right choice for the best data channel at all times. Plug & Play modules also offer you full freedom of choice for deployment of new communication technologies.

Installation support

An indication of phase voltages, phase angles, rotating field and energy direction supports the installation.

Summary of the main features

	ZMD400	ZFD400
Measured quantities		
Energy (quadrants, ph, direction, reverse stop)	17 ¹⁾	
Summation channels (virtual or digital input)	2 ¹⁾	
Losses (OLA, NLA)	2 ¹⁾	
Losses (I^2 , U^2)	2 ¹⁾	
Active energy harmonic distortion	2 ¹⁾	
Rotating field direction	•	
Energy and demand registers		
Energy rates	32	
Total energy	27	
Demand rates	24	
Power factor (combimeters only)	2	
Last average and current demand	2x10	
Memory depth per value (84 values selectable)	53	
Other registers		
Operating time	8	
Diagnostic registers	41	
Tariff module		
Season tables	12	
Week tables	12	
Day tables	12	
Special days (set 26 years ahead)	100	
Time of use control signals	16	
Emergency settings	•	
Active/passive time tables	•	
Control table – 7 different control sources combinations to control 16 control signals		
Communication and digital inputs, TOU; voltage, power factor, demand, current monitoring, status, missing voltages	•	
Load profiles (integration period from 1 up to 60 minutes)		
Independent load profiles	2 (1 optional)	
Maximum number of captured channels	26	
Data information storage (stored data profile, 2 load profiles, event log, dedicated event logs)		
Non-volatile memory (Flash memory)	•	

¹⁾ Value recordable in dedicated load profile from 1 up to 60 minutes (typical 15 minutes).

	ZMD400	ZFD400
Instantaneous values		
Voltage phase-neutral or phase-ground	● ²⁾	–
Voltage phase-phase	–	● ²⁾ (U1-2, U2-3 only)
Current	(I1, I2, I3, IN) ²⁾	(I1, I3) ²⁾
Frequency	● ²⁾	● ²⁾
Phase angles	● ²⁾	–
Active power (+/-)	(P1, P2, P3, P total) ²⁾	P total ²⁾
Reactive power (+/-)	(Q1, Q2, Q3, Q total) ²⁾	Q total ²⁾
Power factor	PF1, 2, 3, (PF total) ¹⁾	PF total ²⁾
TTHD of active power	Sum ²⁾	Sum ²⁾
TTHD of phase voltage	(Phase 1, 2, 3) ²⁾	(Phase 1, 3) ²⁾
TTHD of phase current	(Phase 1, 2, 3) ²⁾	(Phase 1, 3) ²⁾
TTHD of voltage	Sum ²⁾	Sum ²⁾
TTHD of current	Sum ²⁾	Sum ²⁾
Measurements monitoring with thresholds and records in event log		
Over-/under-voltage phase-neutral	●	–
Over-/under-voltage phase-phase	–	●
Over-current (phase and neutral)	●	●
Event logs		
Maximum number of entries time stamped (s)	1000	
Dedicated event log with snapshot		
Maximum number of entries time stamped (s)	30	
Primary or secondary values	●	
SMS alarm capabilities		
Alarm numbers of digital inputs	1 max.	
Alarms on event (SMS)	●	

¹⁾ Value recordable in dedicated load profile from 1 up to 60 minutes (typical 15 minutes).

²⁾ Value recordable in another load profile from 1 up to 60 minutes (typical 1 minute).

E650 Series 4 ZxD400AT/CT – Technical Data

General

Voltage

Nominal voltage U_n ZMD400xT	3 x 58/100 to 69/120 V 3 x 110/190 to 133/230 V 3 x 220/380 to 240/415 V
Extended operating voltage range	3 x 58/100 to 240/415 V

Nominal Voltage U_n ZFD400xT

	3 x 100 to 120 V 3 x 220 to 240 V
Extended operating voltage range	3 x 100 to 415 V (mid-point earthed)

Voltage range	80 to 115%
---------------	------------

Frequency

Nominal frequency f_n	50 or 60 Hz
Tolerance	$\pm 2\%$

IEC-specific data

Current

Nominal current I_n	1 A, 2 A, 5 A, 5 1 A
-----------------------	-----------------------

Maximum current I_{max}

Metrological for $I_n = 1$ A	1.2 A, 2 A, 6 A, 10 A
Metrological for $I_n = 2$ A	2.4 A, 4 A
Metrological for $I_n = 5$ A	6 A, 10 A, 15 A, 20 A
Metrological for $I_n = 5 1$ A	6 A
Overload for $I_{max} = 1.2$ A ... 10 A	12 A
Overload for $I_{max} = 15$ A, 20 A	20 A

Short-circuit current	0.5 s with 20 x I_{max}
-----------------------	---------------------------

Measurement accuracy

ZxD405xT	
Active energy, to IEC 62053-22	class 0.5 S
Reactive energy, to IEC 62053-24	class 1 S

ZxD410xT

Active energy, to IEC 62053-21	class 1
Reactive energy, to IEC 62053-24	class 1 S

Measurement behaviour

Starting current ZxD405xT

According to IEC	0.1% I_n
Typical	0.07% I_n
5 1 A	as 1 A meter

Starting current ZxD410xT

According to IEC	0.2% I_n
Typical	0.14% I_n
5 1 A	as 1 A meter

The start-up of the meter is controlled by the starting power and not by the starting current.

Starting power in M-circuit	single-phase
Nominal voltage x starting current	

Starting power in F-circuit	all phases
Nominal voltage x starting current x $\sqrt{3}$	

MID-specific data

Current (for classes B and C)

Rated current I_n	1.0 A, 5.0 A
---------------------	--------------

Minimum current I_{min}	0.01 A, 0.05 A
---------------------------	----------------

Transitional current I_{tr}	0.05 A, 0.25 A
-------------------------------	----------------

Maximum current I_{max}	2.0 A, 10.0 A
---------------------------	---------------

Measurement accuracy	to EN 50470-3
ZxD400xT	classes B and C

Measurement behaviour

Starting current I_{st}

Class B: I_{st}	0.002 A, 0.01 A
Class C: I_{st}	0.001 A, 0.005 A

General

Operating behaviour

Voltage failure (power-down)

Bridging time	0.5 s
Data storage	after another 0.2 s
Switch off	after approx. 2.5 s

Voltage restoration (power-up)

Function standby 3 phases	after 2 s
Function standby 1 phase	after 5 s
Detection of energy direction and phase voltage	after 2 to 3 s

Power consumption

Power consumption per phase in voltage circuit

Without communication unit, without auxiliary supply

3 x 58/100 to 69/120 V	0.4 W 0.7 VA
3 x 110/190 to 133/230 V	0.5 W 1.0 VA
3 x 220/380 to 240/415 V	0.7 W 1.7 VA
3 x 58/100 to 240/415 V	0.7 W 1.7 VA

Total power consumption in voltage circuit

Without communication unit, without auxiliary supply

3 x 100 to 120 V	1.0 W 2.1 VA
3 x 220 to 240 V	1.2 W 3.0 VA
3 x 100 to 415 V	1.9 W 5.4 VA

Power consumption per phase in voltage circuit

With communication unit, without auxiliary supply

3 x 58/100 to 69/120 V	1.8 W 2.7 VA
3 x 110/190 to 133/230 V	1.8 W 3.5 VA
3 x 220/380 to 240/415 V	1.9 W 4.1 VA
3 x 58/100 to 240/415 V	1.9 W 4.1 VA

Total power consumption in voltage circuit

With communication unit, without auxiliary supply

3 x 100 to 120 V	5.4 W 5.4 VA
3 x 220 to 240 V	5.4 W 10.5 VA
3 x 100 to 415 V	5.8 W 12.3 VA

Power consumption per phase in current circuit

Phase current	1 A	5 A	10 A
Active power (typical)	5 mW	0.125 W	0.5 W
Apparent power (typical)	5 mVA	0.125 VA	0.5 VA

Environmental influences

Temperature range to IEC 62052-11

Metrological	−40 °C to +70 °C
Storage	−40 °C to +85 °C

Temperature coefficient

Range	−40 °C to +70 °C
Average value (typical)	± 0.012% per K
at cosφ=1 (from 0.05 I _b to I _{max})	± 0.02% per K
at cosφ=0.5 (from 0.1 I _b to I _{max})	± 0.03% per K

Ingress protection to IEC 60529 IP51

Electromagnetic compatibility

Electrostatic discharges to IEC 61000-4-2

Air discharge	15 kV
Contact discharge	8 kV

Electromagnetic RF fields to IEC 61000-4-3

80 MHz to 2 GHz	10 and 30 V/m
-----------------	---------------

Radio interference suppression according to IEC/CISPR 22

class B

Fast transient burst test IEC 61000-4-4

Current and voltage circuits	4 kV
Auxiliary circuits > 40 V	2 kV

Surge test IEC 61000-4-5

Current and voltage circuits	4 kV
Auxiliary circuits > 40 V	1 kV

Immunity to conducted disturbances IEC 61000-4-6

150 kHz to 80 MHz	10 V
-------------------	------

Immunity to conducted disturbances according to CENELEC TR 50579

2 to 150 kHz

Insulation strength

Insulation strength 4 kV at 50 Hz during 1 min.

Impulse voltage 1.2/50 μs to IEC 62052-11

Current and voltage circuits	8 kV
Auxiliary circuits	6 kV

Protection class II to IEC 62052-11

Product safety

Normal environmental conditions IEC 62052-31

Overvoltage category	III
Pollution degree	2
Max. operating altitude	2000 m

Calendar clock

Calendar type Gregorian or Persian (Jalaali)

Accuracy < 5 ppm

Backup time (power reserve) meter

With supercapacitor	> 20 days
Charging time for max. backup time	300 h
With battery (optional)	10 years
Battery type	CR-P2
Battery temperature range	−40 °C to +55 °C

Display

Characteristics

Type	LCD (liquid crystal display)
Digit size in value field	8 mm
Number of digits in value field	up to 8
Digit size in index field	6 mm
Number of digits in index field	up to 8

Inputs (passive)**HLV, reinforced insulation by optocoupler**

Number on base meter	3
Number on extension board 420x	4
Number on extension board 240x	2
Control voltage U_S	100 to 240 V _{AC}
Range	80 to 115 %
Input current	< 0.8 mA at 230 V _{AC}

SELV, reinforced insulation by optocoupler

Number on extension board 326x	3
Control voltage U_S	12 to 24 V _{DC}
Range	80 to 115 %
Input current	< 1.5 mA at 24 V _{DC}

Inputs (active)**SELV, reinforced insulation by optocoupler**

Active inputs, external closing contact required for activation (no control voltage necessary)

Number on extension board 421x	4
Open circuit voltage (contact open)	< 5 V
Short-circuit current (contact closed)	< 5 mA
Max. contact resistance	< 500 Ohm

Outputs (solid-state relay)**HLV or SELV, reinforced insulation by solid-state relay**

Voltage	12 to 240 V _{AC/DC}
Max. current for each output	100 mA RMS
Max. switching frequency (pulse length 20 ms)	25 Hz
Contact resistance (typical)	13–18 Ohm

Base meter

Number	2
Max. current all outputs together	200 mA RMS
Derating above 45 °C ambient	0.8 mA / °C

Extension board 420x

Number	2
Max. current all outputs together	200 mA RMS
Derating above 45 °C ambient	0.8 mA / °C

Extension board 240x

Number	4
Max. current all outputs together	200 mA RMS
Derating above 45 °C ambient	0.8 mA / °C

Extension board 060x

Number	6
Max. current all outputs together	200 mA RMS
Derating above 45 °C ambient	0.8 mA / °C

Extension board 045x

Number	4
Max. current all outputs together	200 mA RMS
Derating above 45 °C ambient	0.8 mA / °C

Extension board 047x

Number	4
Max. current all outputs together	200 mA RMS
Derating above 45 °C ambient	0.8 mA / °C

Mechanical relay**HLV, reinforced insulation, intended to control auxiliary devices**

Number on extension board 326x	2
Number on extension board 421x	2
Max. voltage	250 V _{AC}
Max. current for each relay	8 A
Max. current all relays together	8 A
Max. operations with $\cos\varphi \sim 1$	100 000
Contact resistance (typical)	10 mOhm
Withstand across open contact	1000 V _{AC}
Withstand between contacts	1500 V _{AC}

Outputs (optical)**Optical test outputs active and reactive energy**

Type	red LED
Number	2
Meter constant	selectable

Communication interface**Optical interface to IEC 62056-21**

Type	serial, asynchronous, half-duplex
Max. transmission rate	9600 bps
Protocols	IEC 62056-21 and DLMS

Communication units

Exchangeable communication units for various applications.

Additional power supply (optional)**On extension board 045x**

HLV, reinforced insulation	
Nominal voltage range	100 to 240 V _{AC/DC}
Tolerance	80 to 115% U_n
Frequency	50 or 60 Hz

VIN = 80 V

Max. power consumption ¹⁾	5.6 W / 8.4 VA
Max. current	105 mA

VIN = 276 V

Max. power consumption ¹⁾	5.6 W / 12.4 VA
Max. current	45 mA

On extension board 047x

SELV, reinforced insulation	
Nominal voltage range	12 to 48 V _{DC}
Tolerance	80 to 115% U _n
Max. power consumption ¹⁾	5.2 W
Max. current (V _{IN} = 9.6 V)	530 mA

On extension board 326x

SELV, reinforced insulation	
Nominal voltage range	12 to 24 V _{DC}
Tolerance	80 to 115% U _n
Max. power consumption ¹⁾	5.2 W
Max. current (V _{IN} = 9.6 V)	530 mA

¹⁾ Power consumption without mains supply. If auxiliary and mains supply are available, the consumption is shared arbitrarily.

Weight and dimensions

Weight	approx. 1.5 kg
--------	----------------

External dimensions

Width	177 mm
Height (with short terminal cover)	244 mm
Height (with standard terminal cover)	281.5 mm
Height (with extended hook)	305.5 mm
Depth	75 mm

Suspension triangle

Height (with extended hook)	230 mm
Height (suspension eyelet open)	206 mm
Height (suspension eyelet covered)	190 mm
Width	150 mm

Terminal cover

Short	no free space
Standard (opaque, transparent)	40 mm free space
Long (opaque, transparent)	60 mm free space
GSM	60 mm free space
ZxB type 80 mm	80 mm free space
ZxB type 110 mm	110 mm free space
ADP2 adapter	

Housing material

Polycarbonate, partly glass-fibre reinforced

Environmental protection

RoHS compliant design


Connections**Phase connections**

Type	screw type terminals
Diameter	5.2 mm
Recommended conductor cross-section	1.5 to 6 mm ²
Screw head	Pozidrive Combi No. 2
Screw dimensions	M4 x 8
Screw head diameter	≤ 5.8 mm
Tightening torque (min...max)	1.0...1.7 Nm


Other connections

Type	screwless spring-type terminal
Max. current of voltage outputs	1 A


Meter dimensions (standard terminal cover)

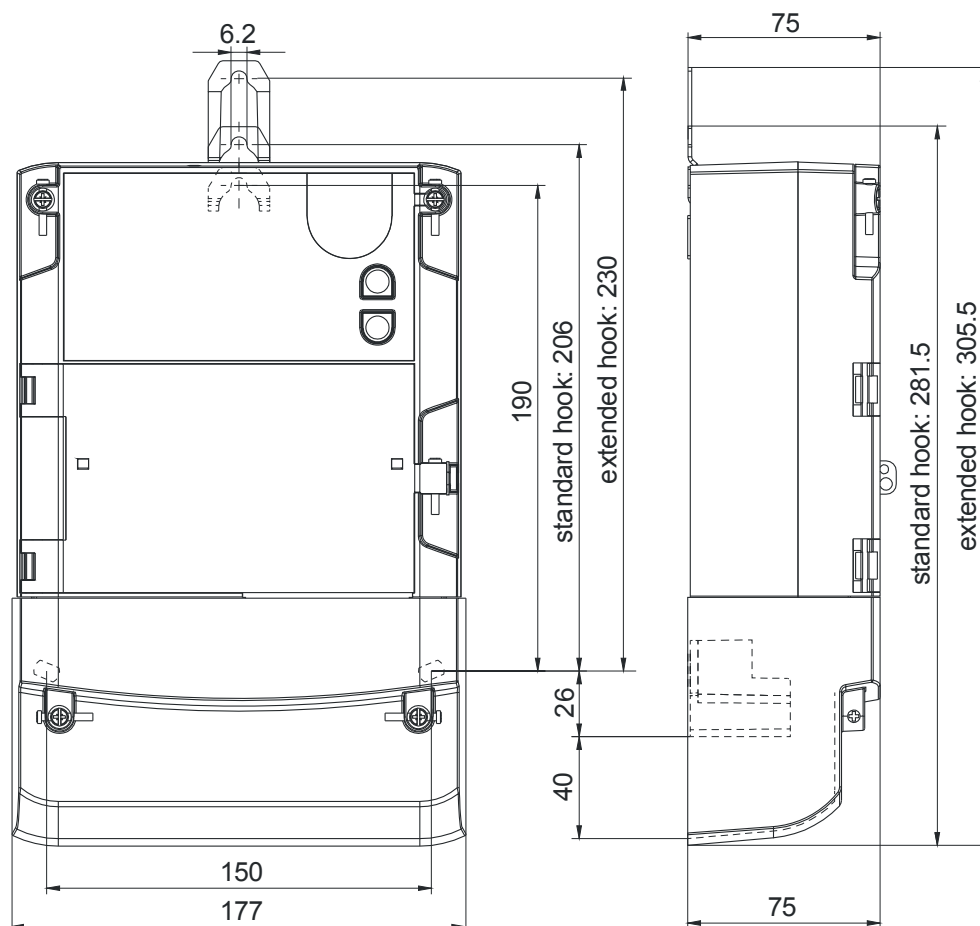


Terminal dimensions

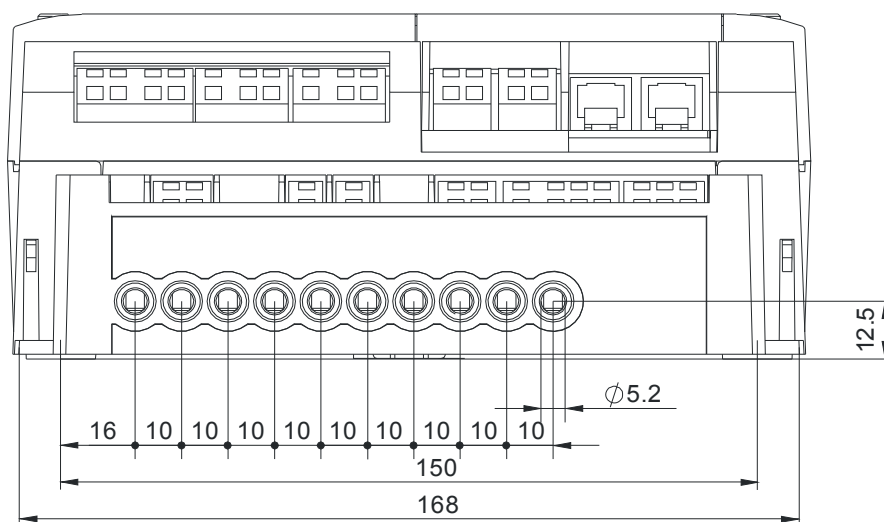

Terminal layout according to DIN

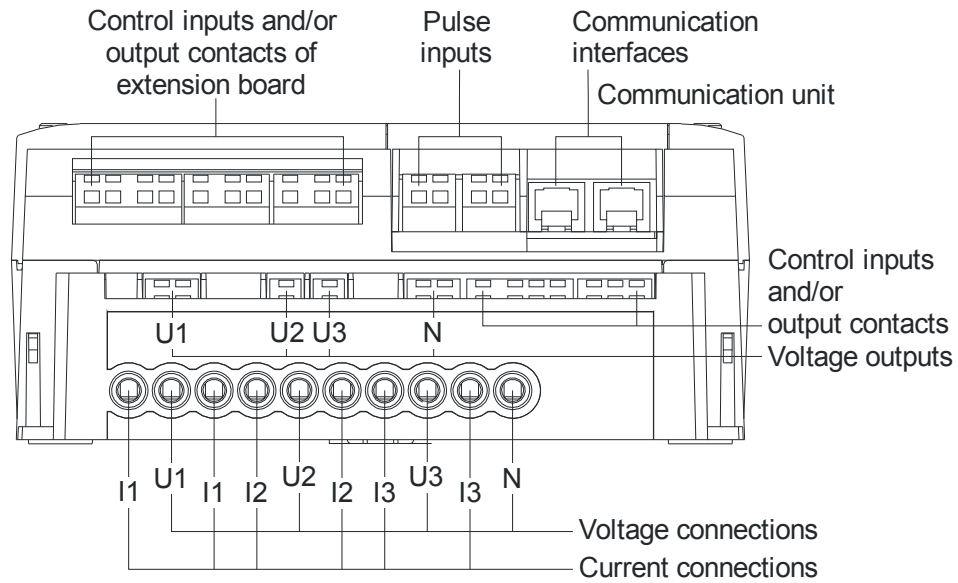

Symmetrical terminal layout (optional, ZMD400 only)

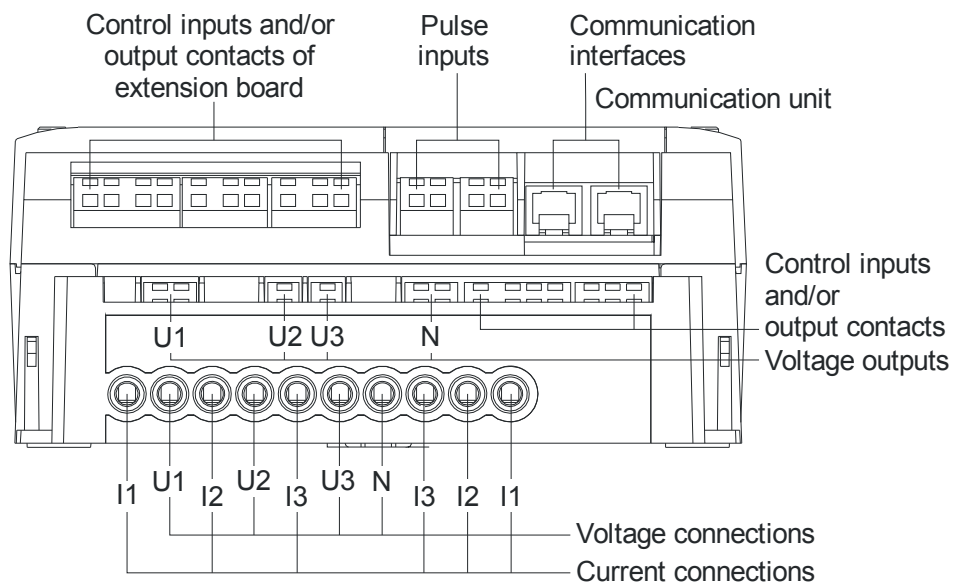

Type designation		ZMD	4	10	C	T	44	4207	S4
Network type									
ZFD	3-phase 3-wire network (F-circuit)								
ZMD	3-phase 4-wire network (M-circuit)								
Connection type									
4	Transformer operated								
Accuracy class									
10	Active energy class 1 (IEC), B (MID)								
05	Active energy class 0.5 S (IEC), C (MID)								
Measured quantities									
C	Active and reactive energy								
A	Active energy								
Construction									
T	With exchangeable communication units								
Tariffication									
21	Energy rates, external rate control via control inputs								
24	Energy rates, internal rate control via time switch (additionally possible via control inputs)								
41	Energy and demand rates, external rate control via control inputs								
44	Energy and demand rates, internal rate control via time switch (additionally possible via control inputs)								
	All versions with 3 control inputs and 2 output contacts								
Additional functions									
000x	No extension board								
060x	6 outputs								
240x	2 control inputs, 4 outputs								
420x	4 control inputs, 2 outputs								
421x	4 active inputs, 2 relay outputs 8A								
326x	3 control inputs, 2 relay outputs, auxiliary power supply 12 to 24 V _{DC}								
045x	4 outputs, auxiliary power supply 100 to 240 V _{AC} /V _{DC}								
047x	4 outputs, auxiliary power supply 12 to 48 V _{DC}								
xxx0	No additional functions								
xxx2	DC magnet detection								
xxx7	Load profile								
xxx9	DC magnet detection and load profile (integrated terminal cover switch option only available in this configuration)								
Series 4									

Contact:

Landis+Gyr AG
Theilerstrasse 1
CH-6301 Zug
Switzerland
Phone: +41 41 935 6000
www.landisgyr.com

